
UK

Mobil[™]

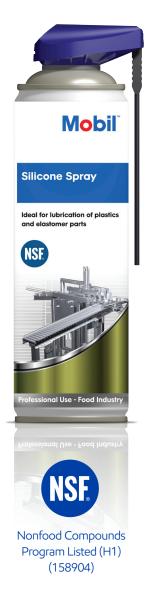

Specifications

Ideal for lubrication of plastics and elastomer parts

Description

Silicone Spray designed for food industry equipment where there is a possibility of incidental food contact.

Properties

Silicone Spray meets the FDA requirements for lubricants with incidental food contact, 21 CFR 178.3570 and is NSF H1 registered.

Silicone Spray doesn't contain animal derivatives and allergens listed in Annex II of Directive 2011/1169/EC on food ingredients.

Silicone Spray is formulated with full synthetic silicone base oil.

Silicone Spray has excellent oxidation and thermal stability.

Silicone Spray is a colourless lubricant for all applications other than metal-to-metal.

Silicone Spray has excellent compatibility with most plastics and elastomers.

Silicone Spray is moisture repellent, water resistant and anti-static.

Applications

Silicone Spray is recommended for the lubrication of machinery used in food and beverage processing and the packaging industry.

Silicone Spray is particularly recommended for the greasing of cylinders, slides, guides, axles, columns, rollers, conveyors, belts, etc.

Silicone Spray is also recommended for mould release for plastics and rubbers and as a general lubricant for plastic and elastomer parts.

	Unit	Value
Appearance	_	Liquid
Colour Propellant gas	-	Colourless Butane/Propane
Volume	ml	500
NSF Registration	_	158904

Health/Safety

For information about safe handling and use of this product, refer to the Material Safety Data Sheet.

Storage & Handling

Caution pressurized container: protect from sunlight and other heat sources.

Use by Date

3 years after manufacture

Manufacture date can be identified from bottom of bottle as follows:

- 1. First 3 numbers indicate the day of the specific year (159 means 159th day of the given year)
- 2. Letter to indicate production run on the day (A, B, C etc.)
- 3. Number to indicate filling line (between 1 and 5)
- 4. Last number for example 9 indicates the year 2019

Note

The data contained in this publication is based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, this data does not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.





Terms & Conditions: © 2018. All rights reserved to Moove Lubricants Limited. Mobil and Mobil products named in this material are registered brands and trademarks of Exxon Mobil Corporation or one of its subsidiaries, licensed for use to Moove Lubricants Limited who are responsible for this document and the use of such trademarks within it. No part of this document or any trademark is permitted to be copied, reproduced or otherwise used or applied without prior consent.

Manufactured by Moove Lubricants Limited. Operations Plant Dering Way, Gravesend, Kent DA12 2QX +44 (0) 1474 564 311